

CAVITE STATE UNIVERSITY
D A C

BILL OF QUANTITIES

IMPROVEMENT OF SPORTS FACILITY PHASE II

ABC: 2,307,949.22

COLLEGE/UNIT/CAMPUS: MAIN CAMPUS

Item

Bill of Quantities

4. Site temporary enclosure may be blue sack or any suitable materials that may enclose the workplace.


5. Demobilization includes cleaning up of site, clearing, hauling and disposal of waste and construction debris. Responsibility of any damages shall also be done before exiting the site area.

II. Dismantling and chipping works

1. This work includes dismantling of 4 sets 12.0 meters existing steel post and spot/flood lights.
2. Chipping works for conduit pipe raceway.
3. Supply the project inspector for the other scope and technical details of the project.
4. The area should be cleared/cleaned before and after the construction work at least ten meters away from the building line. Unusable used components and all other unwanted debris of construction works should be disposed of properly. Notify the end-user regarding the properties that need to be hauled away from the site prior to construction.

Electric Works

1. Supply and

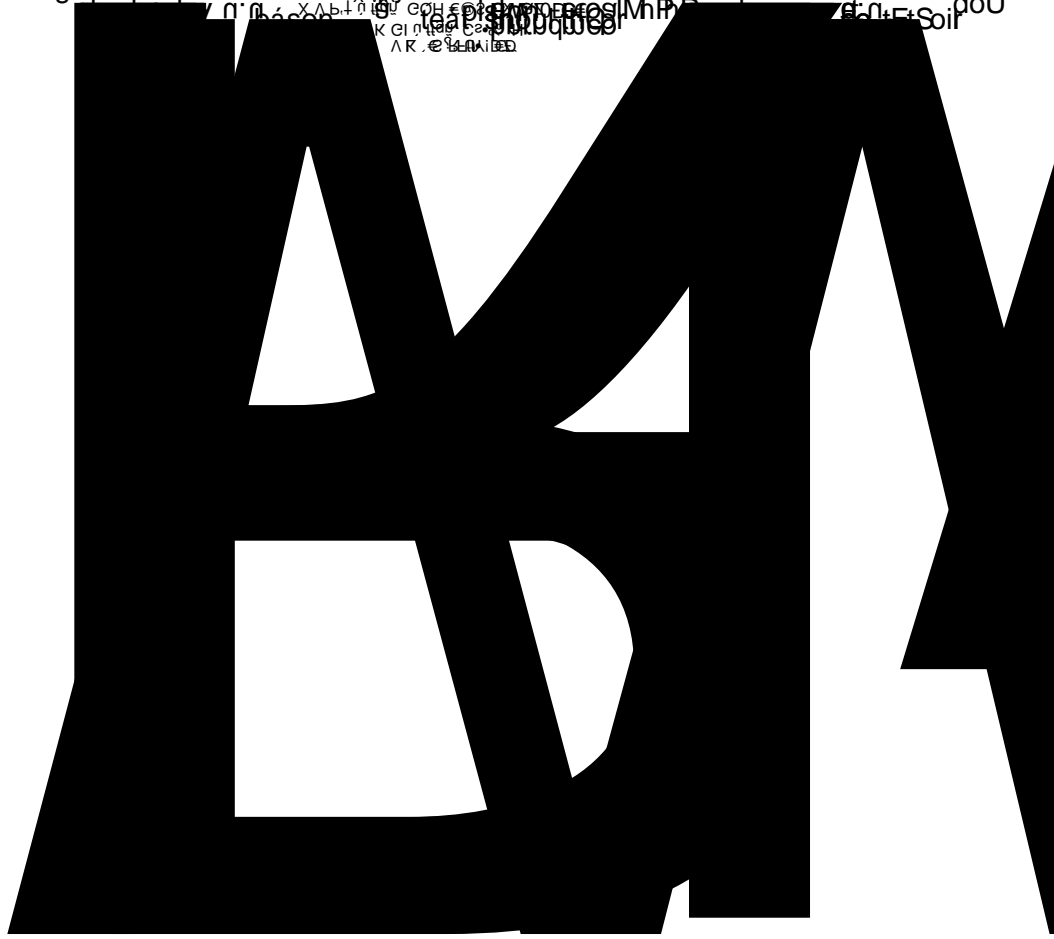

university. In cases where there are electrical works, it is required that an electrical engineer or a master electrician be a part of the contractor's team to supervise all electrical works. Likewise, master plumbers must supervise plumbing works. It can be considered when only one person is the master plumber and master electrician at the same time as long as his major duty is supervision of both fields. Safety engineer is a must as per DOLE requirement. **Note: All key personnel should be included in the list of personnel for submission.**

∇H. In cases of participation in two or more projects, the set of workers and foreman shall be different per project, however,

I